


EOLO 330

Electric - Petrol

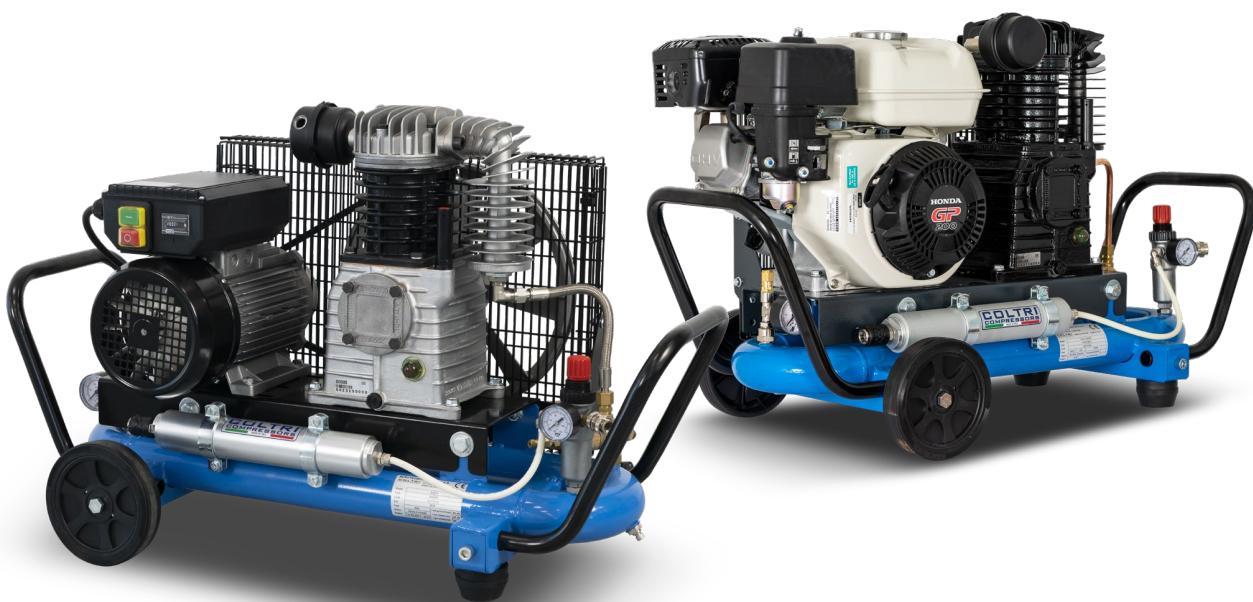

EOLO 330 EM

Charging rate

330 l/min

Filling time

4,5 liters

Engine power

2,2 kW
Single-phase electric

Dimensions¹
(L x D x H)

EOLO 330 ET

330 l/min

4,5 liters

3,0 kW
Three-phase electric

EOLO 330 SH
Petrol HONDA GP 200

330 l/min

4,5 liters

3,6 kW
Petrol HONDA GP 200

Weight¹
(dry weight)

55 kg
121 lb

54 kg
119 lb

¹ Standard model. Weight and dimensions may vary depending on accessories.

The **EOLO 330** series is composed of low pressure Coltri breathing air compressors, suitable for professional use and driven by a three-cylinder pumping unit that guarantees excellent performance. Equipped with a filter with interchangeable cartridge, it is ideal for underwater work or with ventilated helmets. The available motorizations are electric, single-phase or three-phase, and Honda internal combustion engines. The watchword is maneuverability, thanks to the built-in tank and the presence of wheels.

EOLO 330 SH
Petrol HONDA GP 200

Fuel tank capacity	3,1 liters
Fuel consumption at continuous power	1,7 l/h – 3600 rpm

Working pressure 8 bar

Standard equipments



Breathing air filter



Adjustable pressure switch

Optional



Remote suction hose kit



2nd stage regulator



Food grade floating pipe



Double output T-coupling